

# Ultraflex 7 Sahara

for HOT countries



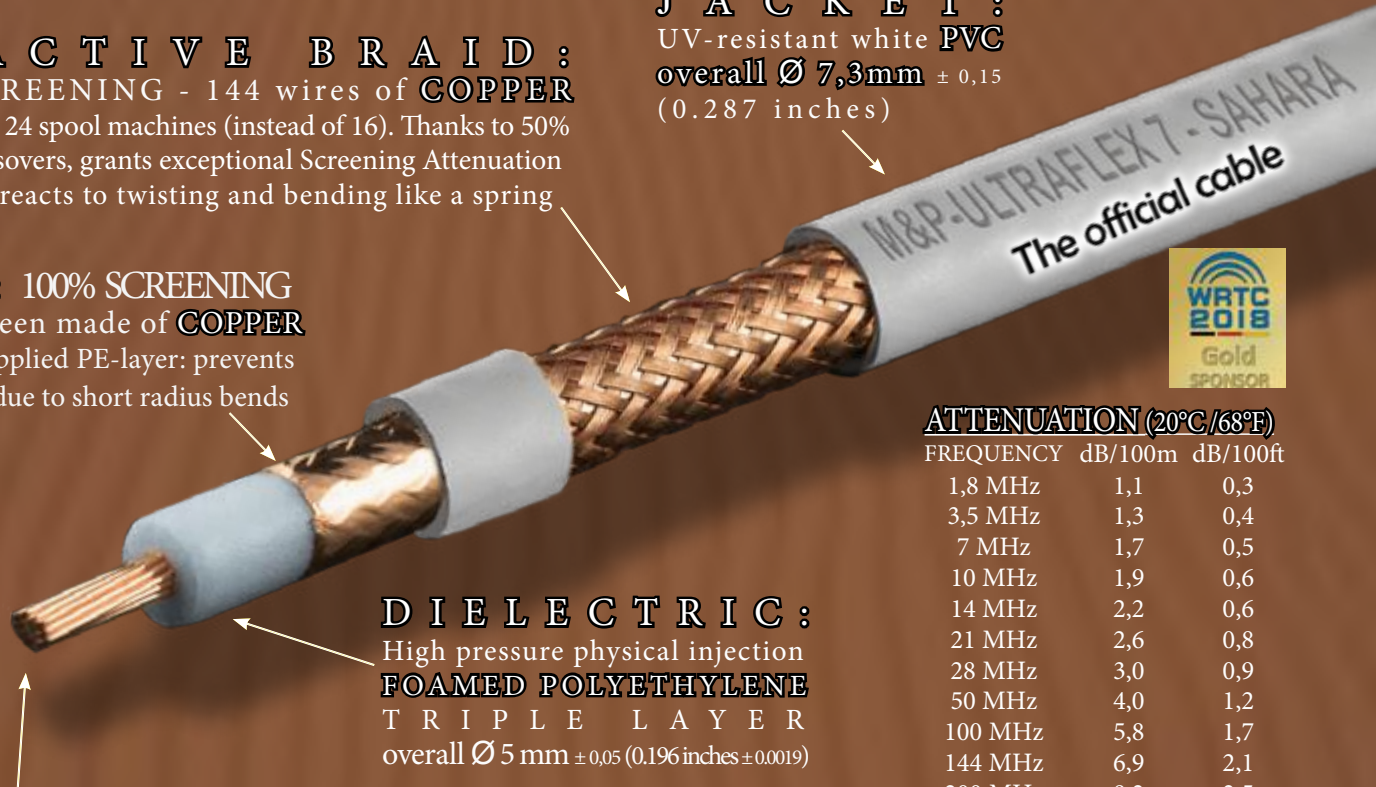

**REACTIVE BRAID :**  
83% SCREENING - 144 wires of COPPER made with 24 spool machines (instead of 16). Thanks to 50% more crossovers, grants exceptional Screening Attenuation (SA) and reacts to twisting and bending like a spring

**JACKET :**  
UV-resistant white PVC  
overall Ø 7,3mm ± 0,15  
(0.287 inches)

**FOIL: 100% SCREENING**  
First screen made of COPPER with an applied PE-layer: prevents cracking due to short radius bends

**DIELECTRIC :**  
High pressure physical injection  
**FOAMED POLYETHYLENE**  
**TRIPLE LAYER**  
overall Ø 5 mm ± 0,05 (0.196 inches ± 0.0019)

**INNER CONDUCTOR :**  
19x0,38mm COPPER wires - overall Ø 1,9 mm  
(19x0.015 inches - overall Ø 0.075 inches ± 0.0059)



**ATTENUATION (20°C/68°F)**

FREQUENCY	dB/100m	dB/100ft
1,8 MHz	1,1	0,3
3,5 MHz	1,3	0,4
7 MHz	1,7	0,5
10 MHz	1,9	0,6
14 MHz	2,2	0,6
21 MHz	2,6	0,8
28 MHz	3,0	0,9
50 MHz	4,0	1,2
100 MHz	5,8	1,7
144 MHz	6,9	2,1
200 MHz	8,2	2,5
400 MHz	11,8	3,6
430 MHz	12,3	3,7
800 MHz	17,1	5,2
1000 MHz	19,3	5,8
1296 MHz	22,3	6,8
2400 MHz	32,3	9,8
3000 MHz	36,2	11,0
4000 MHz	42,6	12,9
5000 MHz	49,3	15,0
6000 MHz	55,3	16,8
7000 MHz	61,6	18,7
8000 MHz	68,4	20,8

**ELECTRICAL DATA**

Impedence @200Mhz:	50 Ohm ± 3
Minimum bending radius:	{ up to 15 bends: 68mm (2.68 in) single bend (choke): 34mm (1.34 in)
Temperature:	-40°C to +60°C (-40°F to +140°F)
Capacitance:	75 pF/m ± 2 (22.9 pF/ft ± 2)
Velocity ratio:	83%
Screening Efficiency (SA)	100-2000 MHz >105 dB
Screening Class:	A++
Inner conductor resistance:	7,3 Ohm/Km (2.2 Ohm/1000ft)
Outer conductor resistance:	9,8 Ohm/Km (3.0 Ohm/1000ft)
Tension test (spark test):	4 kV
Net weight (100m/100ft):	6,9 Kg (4.6 lb)
Maximum peak power:	8.000 WATT
Connectors:	UHF (PL), N, BNC, SMA, TNC

**SRL**

0,3-600 MHz	>28 dB
600-1200 MHz	>22 dB
1200-2000 MHz	>18 dB

**POWER HANDLING (40°C/104°F)**

FREQUENCY	MAX P.	FREQUENCY	MAX P.
1,8 MHz	4572 W	430 MHz	353 W
3,5 MHz	3393 W	800 MHz	254 W
7 MHz	2714 W	1000 MHz	225 W
10 MHz	2286 W	1296 MHz	195 W
14 MHz	1974 W	2400 MHz	134 W
21 MHz	1670 W	3000 MHz	120 W
28 MHz	1448 W	4000 MHz	102 W
50 MHz	1086 W	5000 MHz	88 W
100 MHz	749 W	6000 MHz	79 W
144 MHz	629 W	7000 MHz	71 W
200 MHz	530 W	8000 MHz	63 W
400 MHz	368 W		

**OUR PRODUCTS ARE MANUFACTURED IN COMPLIANCE WITH:**

CEI 46-1 (construction parameters); EN 50117 (screening efficiency); CEI EN 50289 (SA test methods); R118 (ISO7622-1); IEC 60332-1-2 (cables with PVC and LSZH jacket); CPR305/11 (EN50575:2014 - DoP number: MP00100)

## WHY CHOOSE THIS CABLE

- Outclasses RG213/U and RG8 for performances, despite the smaller dimension (7,3mm).
- Extraordinary flexibility: designed for tight bendings and rotor antennas.
- Lighter and more manageable: the practicality of smaller cables and the performances of 10mm coax.
- Perfect for portable use, CB radio, modem-router 4G/LTE, patch cords, jumpers (lab, amplifiers, etc).
- Selected by you as the official coax of World Radio Championship WRTC 2018 and 2022 in Germany and Italy.

## FREQUENCY SUGGESTIONS

### HF (from 3MHz to 30Mhz)

#### example at 14 MHz

**EXCELLENT** up to 60m of cable length

**GOOD** up to 100m of cable length

**Choose a bigger cable** above 100m:

#### example 28 MHz

**EXCELLENT** up to 50m of cable length

**GOOD** up to 75m of cable length

**Choose a bigger cable** above 75m

### VHF (from 30MHz to 300Mhz)

#### example at 50 Mhz

**EXCELLENT** up to 35m of cable length

**GOOD** up to 50m of cable length

**Choose a bigger cable** above 50m

#### example at 144 Mhz

**EXCELLENT** up to 15m of cable length

**GOOD** up to 25m of cable length

**Choose Ø 10,3mm cable** above 20m

### UHF (from 300MHz to 3000Mhz)

#### example at 430 MHz

**EXCELLENT** up to 10m of cable length

**GOOD** up to 15m of cable length

**Choose a bigger cable** above 15m

#### example at 1296 MHz

**GOOD** up to 5m of cable length

**Choose a bigger cable** above 5m

#### example at 2400 MHz

**GOOD** up to 3m of cable length

**Choose a bigger cable** above 3m

\*data valuable for Power Application (trasmission)

\*\*you can find Watt / MAX POWER in the datasheet above.



## RESIDUAL POWER PERCENTAGE (Cable Run Efficiency)

Given a power fed to the X value (any value expressed in Watts), the actual power output of the cable is shown in the table in the form of remaining percentage. (for example, if we use a cable such as M&P-ULTRAFLEX 7, entering 1000 Watts over a length of 35m, at a frequency of 144 MHz, there remains 57,2% of 1000). **For maximum applicable power, see the Power Handling of the cable concerned.** From these values, have already been deducted the SRL values, typical of each one of our models, for the respective frequencies.

**REMEMBER: Make sure to match the line accurately!**

		<b>M&amp;P-ULTRAFLEX 7 / .287"</b>													
feet		16,4	32,8	49,2	65,6	82	114,8	164	246	328	426,5	524,9	656,2	984,2	
meters		5	10	15	20	25	35	50	75	100	130	160	200	300	
Wave length	MHz	Useful signal output (residual power %)													
Frequencies	85.71 m	3,5	98,4	97,0	95,6	94,2	92,8	90,1	86,2	80,1	74,4	68,1	62,3	55,4	41,2
	42.85 m	7	98,1	96,3	94,5	92,8	91,1	87,8	83,1	75,8	69,1	61,8	55,4	47,8	33,0
	21.42 m	14	97,4	95,0	92,6	90,3	88,0	83,7	77,5	68,3	60,2	51,7	44,4	36,2	21,8
	10.71 m	28	96,5	93,2	90,1	87,0	84,0	78,4	70,7	59,5	50,0	40,6	33,0	25,0	12,5
	6 m	50	95,4	91,1	87,0	83,1	79,3	72,3	63,0	50,0	39,7	30,1	22,8	15,7	6,2
	2.08 m	144	92,3	85,2	78,7	72,7	67,1	57,2	45,1	30,3	20,3	12,6	7,8	4,1	
	69 cm	430	86,6	75,2	65,2	56,6	49,1	37,0	24,1	11,8	5,7				
	23.1 cm	1296	76,7	59,2	45,6	35,1	27,0	15,9	7,0						
	12.5 cm	2400	67,4	45,9	31,2	21,0	14,0	5,8							
	10 cm	3000	64,3	41,9	27,1	17,3	10,9	3,8							
	7.5 cm	4000	59,2	35,4	20,9	12,0	6,6								
	6 cm	5000	53,5	28,9	15,0	7,1									
	5 cm	6000	48,9	24,0	10,8	3,8									

## M&P-ULTRAFLEX 7 / .287" Power Handling/Temperature (in Continuous Carrier)

		Temperature C° / F°										
Wave length	MHz	-10 / 14	-5 / 23	0 / 32	10 / 50	20 / 68	30 / 86	40 / 104	50 / 122	60 / 140	70 / 158	
Frequencies	166.66 m	1,8	6838	6838	6638	6217	5724	5138	4572	3900	3228	2560
	85.71 m	3,5	5252	5076	4927	4614	4248	3814	3393	2894	2395	1900
	42.85 m	7	4202	4061	3941	3692	3398	3051	2714	2315	1916	1520
	30 m	10	3538	3420	3319	3109	2862	2569	2286	1950	1614	1280
	21.42 m	14	3056	2953	2866	2685	2472	2219	1974	1684	1394	1105
	14.28 m	21	2586	2499	2425	2272	2091	1878	1670	1425	1179	935
	10.71 m	28	2241	2166	2102	1969	1812	1627	1448	1235	1022	811
	6 m	50	1681	1624	1577	1477	1359	1220	1086	926	767	608
	3 m	100	1159	1120	1087	1018	937	842	749	639	529	419
	2.08 m	144	974	942	914	856	788	707	629	537	444	352
	1.5 m	200	820	792	769	720	663	595	530	452	374	297
	75 cm	400	570	551	534	501	461	414	368	314	260	206
	69 cm	430	547	528	513	480	442	397	353	301	249	198
	37.5 cm	800	393	380	369	345	318	285	254	217	179	142
	30 cm	1000	348	337	327	306	282	253	225	192	159	126
	23.1 cm	1296	301	291	283	265	244	219	195	166	137	109
	12.5 cm	2400	208	201	195	183	168	151	134	115	95	75
10 cm	3000	186	179	174	163	150	135	120	102	85	67	
7.5 cm	4000	158	153	148	139	128	115	102	87	72	57	
6 cm	5000	136	132	128	120	110	99	88	75	62	49	
5 cm	6000	122	117	114	107	98	88	79	67	55	44	
4.2 cm	7000	109	105	102	96	88	79	71	60	50	39	
3.75 cm	8000	98	95	92	86	79	71	63	54	45	36	

Do not use the cable as power supply for both direct current and 50-60 HZ mains

# GENERIC COAXIAL CABLE APPLICATIONS\*

- Aircraft communications
  - Amateur Radio
  - Antenna
  - Antenna Analyzer
  - Beacons Base Station
  - Broadcast Radios
  - CB Radio (Citizen Band)
  - CB Radio Scanner
  - Dummy Load
  - Land Mobile Communications
  - Maritime Mobile Communications
  - Military Communications
  - Microwave Relay System
  - Moon Bouncing Transmission EME
  - Mobile Transmission Applications (Car, Van, Caravans, Trucks, etc.)
  - Motorhome
  - Network Analyzer
  - Portable Handheld Radio (Walkie Talkie - PMR antenna extension)
  - Radar
  - Radio Astronomy and Telescope
  - Radio Receivers
  - Router connections
  - Satellite Radio
  - Scanner
  - Switch connections
  - SWR Meter connections
  - Transceiver
  - Tuner connections
  - Weather Radio Antenna Extension
- \*See "Frequency Suggestions" for a correct correlation

## PRE-ASSEMBLED COAX JUMPERS

YOU'VE NO TIME FOR ASSEMBLING THE CONNECTORS YOURSELF?  
GRAB OUR FACTORY MADE COAX JUMPERS "LAB TESTED" ONE BY ONE!  
LAB CERTIFICATE ENCLOSED IN EACH PACKAGING.



## USEFUL ACCESSORIES



SPECIAL COAX SCISSORS



ADHESIVE REUSABLE  
VELCRO



CABLE PULLING LUBRICANT



M&P T-SHIRT



UNWINDERS FOR COILS AND BOBBINS



# CONNECTORS for 7,3mm (.287") Coaxial Cables



## EVOlution

### “UHF” (PL-259) Male Solder

Watch the Assembly

**Video:**

<https://youtu.be/c9FhvNKpMR4>

**Code:**

CO.UHF.7M-S EVO



### “UHF” (PL-259) Female Solder

Watch the Assembly

**Video:**

<https://youtu.be/holnER7UGo>

**Code:**

C.UHF.AC7F-S



### “N” Male Solder

Watch the Assembly

**Video:**

<https://youtu.be/LbiDRPEgtlo>

**Code:**

CO.N.7M-S



### “N” Female Solder

Watch the Assembly

**Video:**

<https://youtu.be/-RTkDU4gxjw>

**Code:**

C.N.AC7F-S



### “N” Male Crimp

Watch the Assembly

**Video:**

<https://youtu.be/hDcL8rDc6JA>

**Code:**

C.N.AC7M-CR



### “UHF” Male Solder - 90° Angle

Watch the Assembly

**Video:**

<https://youtu.be/M-gCs-iZqoE>

**Code:**

C.UHF.AC7-M90



### “N” Male Solder - 90° Angle

Watch the Assembly

**Video:**

<https://youtu.be/QXKlR4a-OOo>

**Code:**

C.N.AC7M-90

# CONNECTORS for 7,3mm (.287") Coaxial Cables



## "SMA" Male Solder

Watch the Assembly

**Video:**

<https://youtu.be/ClaO7xDQPUw>

**Code:**

C.SMA.AC7M-S



## "BNC" Male Solder

Watch the Assembly

**Video:**

<https://youtu.be/Ss13iNlygQ>

**Code:**

C.BNC.AC7M-S



## "BNC" Male Crimp

Watch the Assembly

**Video:**

<https://youtu.be/dQpnp1WhWP4>

**Code:**

C.BNC.AC7M-CR



## "BNC" Female Solder

Watch the Assembly

**Video:**

<https://youtu.be/ruVcqS2ry8o>

**Code:**

C.BNC.AC7F-S



## "TNC" Male Solder

Watch the Assembly

**Video:**

<https://youtu.be/AuVS2MEoSAI>

**Code:**

C.TNC.AC7M-S



## "TNC" Male Crimp

Watch the Assembly

**Video:**

<https://youtu.be/vW9gfig-pK4>

**Code:**

C.TNC.AC7M-CR